

NIDAC


DRI

“Series 1”

DIALLER CONTROL OUTPUT
RELAY INTERFACE FOR THE

DT6I

“Series 2”

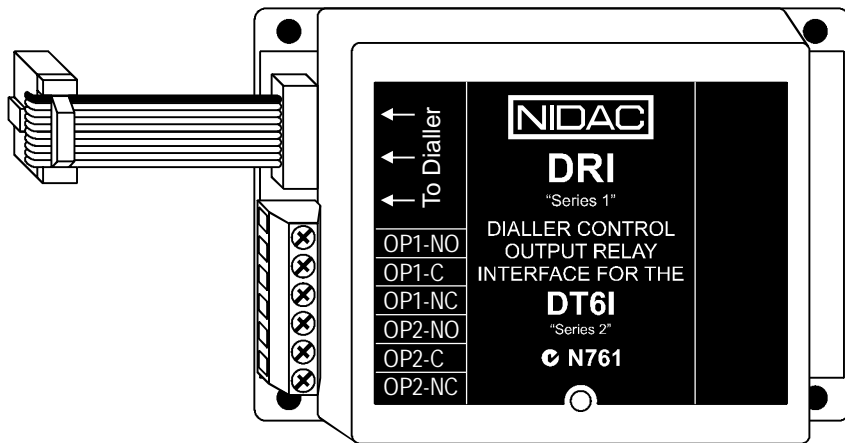

Designed and Manufactured by:

NIDAC SECURITY PTY. LTD.

2 Cromwell Street
Burwood, Victoria
Australia 3125

Phone: +61 3 9808 6244

Fax: +61 3 9808 9335

SPECIFICATIONS

Relay Contacts: 30 Volt, 5 Amp A.C./D.C. SPDT

Connections: 6 screw terminals & 10 pin IDC Socket.

Dimensions: 104mm x 72mm x 27mm.

Wire lead length 300mm.

Weight: 115gms.

TERMINAL DESCRIPTIONS

OP1-NO Output 1 Normally Open Relay Contact.

OP1-C Output 1 Common Relay Contact.

OP1-NC Output 1 Normally Closed Relay Contact.

OP2-NO Output 2 Normally Open Relay Contact.

OP2-C Output 2 Common Relay Contact.

OP2-NC Output 2 Normally Closed Relay Contact.

WARRANTY

NIDAC SECURITY PTY. LTD. will repair or replace this product if proven to be faulty (excluding accidental or malicious damage) under the 36 month warranty offered from the date of purchase.

As NIDAC SECURITY PTY. LTD. or it's agents do not perform the final installation, inspection or training in the use of this product, they cannot be held liable for injury, loss or damage directly or consequentially arising from the use or misuse of this product.

Design improvement and specification are subject to change without notice. All designs are copyright NIDAC SECURITY PTY. LTD. 2003.



NIDAC

“When you're serious about security”